



## The Galaxy Series™

Beautiful fires demand to be seen and Stellar's Galaxy Series™ provides taller viewing areas and more BTU's of flame than any other in its class.

#### Standard Features:

- · Standard black interior
- · Beautiful ribbon burner
- LED ember lights perfectly accents the fire and fills the firebox with any color of light you'd like (remote control standard)
- · Crystal glass media standard
- · Commercial grade components
- · Co-linear direct vent system with choice of standard powervent system or in-line powervent system
- · Wall switch standard
- Mechanical intake damper keeps the cold air out
- · Insulated firebox standard

### Options:

- · Additional colors of glass media
- · Variety of natural stone choices
- · Mirrored firebox panels
- · Driftwood log set
- · Envision interior panels
- · Universal intake and exhaust louvers

## 7 Designs - 4 Widths - 2 Heights

It's easy to be taken in by the beautiful fire of a Galaxy fireplace at first glance, so we've designed the whole series around that to ensure that the beautiful fire remains the focal point no matter where you are in the room.

Whether you're adding a grand single-sided fireplace to your room or using a multi-sided fireplace as a divider to help break up an open concept layout, you have seven different design configurations, in four different widths and two different heights, to help find the perfect fireplace for the space.

7 different designs: Single-Sided, Bay, See-Through, Pier, Four-Sided and Left & Right Corners


4 different lengths: 4', 5', 6' & 7' 2 different heights: 2' & 3'



Single-Sided - 7' x 2' view



Pier - 4' x 2' view



Four-Sided - 6' x 2' view



Bay - 5' x 3' view



See-Through - 6' x 3' view

Left Corner -5' x 2' view



## Standard LED Lights Glass Media & Natural Stone Options

#### Our Flames Aren't The Only Dazzling Sight In The Firebox

Each Galaxy Series fireplace comes standard with an LED-lighted media bed. This includes a remote control to set the lights to a myriad of different hues and patterns to match whatever mood or color scheme you'd like. It can be changed at any time, easily - with a touch of a button.

The Galaxy fireplaces come standard with the Crystal glass media. The clear, reflective glass pieces have various sizes and are the perfect material for the LED lights to shine through and accent the beautiful fire.

If you'd like a more earthy look, there are natural stone options available in a variety of colors. The Natural Stone pairs perfectly with the optional driftwood log set and, although the LED Lights do not shine through the bottom as strong, you will enjoy a subtle hint of colors.

Additional color options of the glass media and natural stone ordered separately.

#### Glass Media

The glass media ranges from 1/2" - 3/4" in size





Red



Crystal is shipped standard with the fireplace unless another color is specified at the time of order.

Crystal



Copper



Black

Dark Blue

## Natural Stone

The natural stone ranges from 1/2" - 1" pebbles in size. High polished black is also available in a larger 1" - 2" pebble size









High Polished Black 1 (1/2" - 1")

Polished Mixed

Polished White








High Polished Black 2 (1" - 2")

Polished Red

Lava Stone

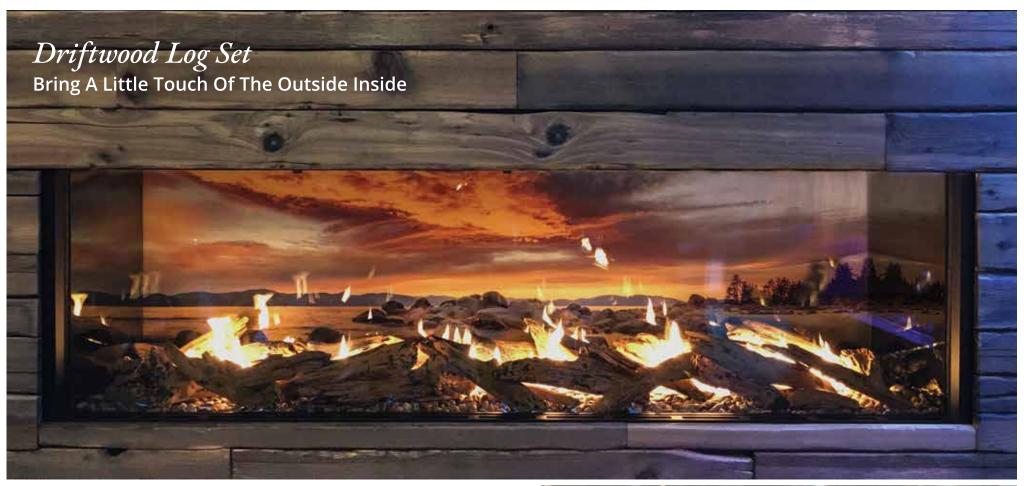

7-SS-2-GL shown with optional Envision printed mirrored panels, driftwood and natural stone

## Driftwood Log Set Option

The ribbon burner of the Galaxy fireplace may seem more contemporary at first thought, but when you add in the natural stone and a driftwood log set, you get a lovely blend of traditional and modern styles and a true classic, timeless look.

Shown above with the *Envision Interior Panels*, it makes you feel like you are looking directly through the fireplace to a beautiful seascape sunset right outside your back door. The slight mirrored quality to the glass creates reflections that look different from every angle of the room.



Beautiful Attention To Detail

Each log set has between 17-31 individual logs in a large variety of sizes that have been molded using real pieces of natural driftwood.



# Optional Mirrored Firebox Panels Create Beautiful Reflections That Look Different From Every Angle

Putting mirrors inside a firebox may seem like an unexpected choice, but it truly can take the experience of a beautiful fire to a whole new level.

The mirrors reflect the flames, driftwood, media and LED lights over and over again, creating a look that is different from wherever you are within the room.

You can control the amount of reflections depending on which side of the mirrors you use. There is the more subtle reflective side, or the opposite side which has a high-sheen to it (see photo to the left) where you get endless iterations and a firebox full of flames.







#### Any High-Definition Image Can Be Used

All we need is an image (300 DPI or higher) and we can customize the interior of your fireplace with whatever look you desire.

Create eye-catching interiors that can be easily changed out if you decide you'd like to refresh the look at a later date.

## Envision Interior Panels Option

Taking customization one step further, you can now put virtually anything you want inside your fireplace by printing the image of your choice onto interior glass panels.


The design potential is limitless to create a one-of-a-kind interior using artistic scenes, landscapes, business names or logo's and more.

It's also a great way to match the exterior finishing materials such as brick, marble, tile or stone and have a seamless transition to the interior firebox with quick and easy installation.

Not available for four-sided fireplaces.



## Finishing Guidelines

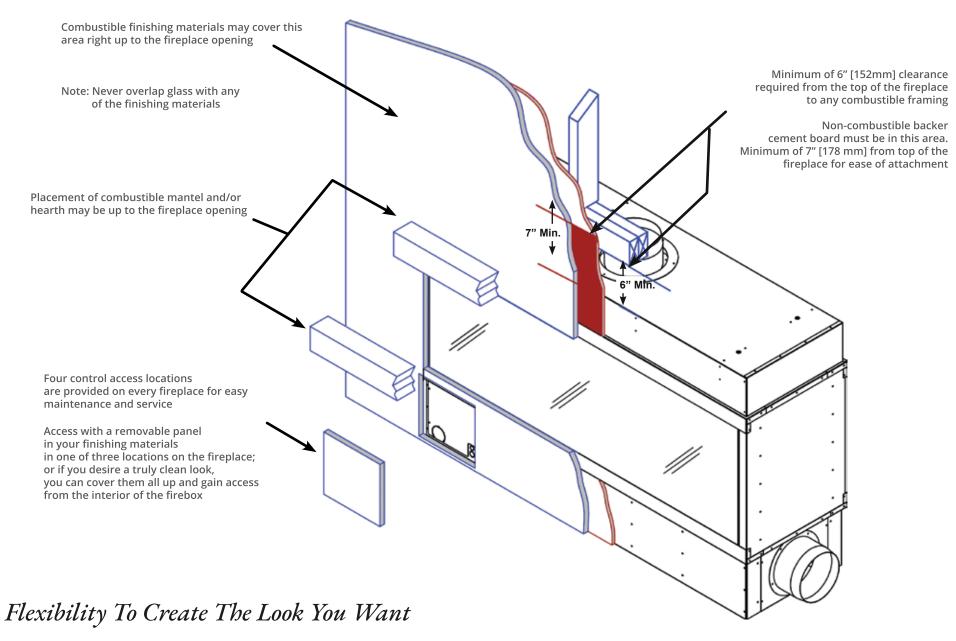

How you finish the area off around the fireplace will increase its impact on the space and reflect who you are.

Whether your taste is more subtle and you prefer the simplistic details of a clean modern look,

or you appreciate the juxtaposition of combining natural with industrial materials, or you like to push the envelope using unexpected artistic twists, the Galaxy Series was designed with minimal clearances to combustibles so you can get as creative as you'd like.

## Powervent Technology

Each fireplace in the Galaxy Series uses a powervent exhaust system, which allows for great installation flexibility as to where you can install the fireplace within the structure.

Each fireplace will vent off the top of the fireplace.\*
Whether the desired cap location is a vertical or side wall application, you have up to 110 feet and 11 elbows to plan your vent run with, allowing the fireplace to be right where you want it.


Both regular powervent or in-line options available.

#### Flexible Vent Runs

- · Up to 110 feet
- · Up to 11 elbows
- · Up to 6' down
- · For vent runs over 50' and/or 5+ elbows consult with Stellar Hearth directly

Model	Flue	Outside Air
4'	8"	10"
5'	8"	10"
6'	10"	10"
7'	10"	10"

\* If venting is desired/necessary off the sides, back or bottom of the fireplace, consult with your Stellar Hearth Products sales representative to have a custom fireplace designed.

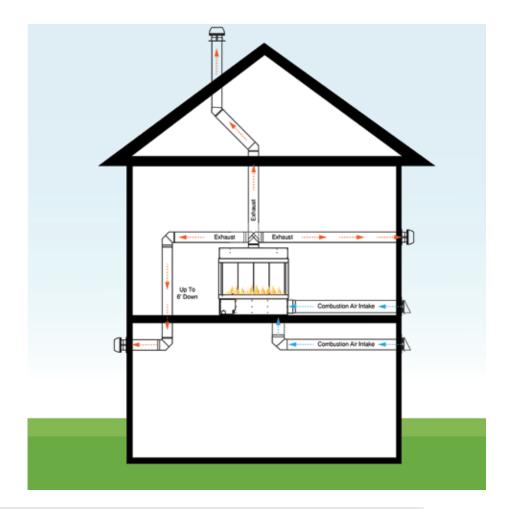


#### Universal Intake & Exhaust Louver

The sleek design of the universal louver is a great option to use for the termination cap for both the exhaust when using an in-line powervent or for the outside air intake.




#### Features:

- · Size: 21-1/4" H X 21-1/4" W
- · Flush Mount
- · Properly sized to use either an 8" or 10" collar
- · UL Certified
- · Stainless Steel / Rain resistant
- · Fully insulated
- · Can be painted

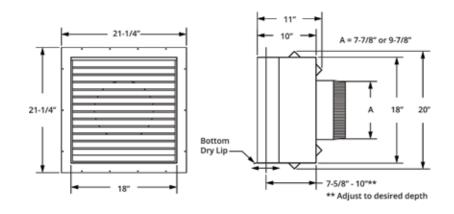




# Single-Sided Specifications




Left Side View




Front View


Right Side View



See-Through Specifications



Left Side View



X 1/2 [45]


C 3 [76]

A CCESS PANEL FRONT AND REAR FRONT AND REAR COMPA

Front View

6 21/32 - [169]

Right Side View



5-ST-2-GL See-Through Galaxy shown with optional mirrored firebox panels

	SINGLE SIDED - SPECIFICATIONS							SINGLE SIDED - FIREPLACE DIMENSIONS										
Model #	BTU'S	B-VENT	OUTSIDE AIR	REG PV	IN-LINE PV	A INNER GLASS	B VIEWING HEIGHT	C VIEWING WIDTH	D FIREBOX WIDTH	E CENTER OF VENT	F FIREBOX DEPTH	G HEIGHT TO TRIM TOP	H TOTAL FIREBOX HEIGHT	WIDTH	HEIGHT	DEPTH		
4-SS-2-GL	60,000	8"	10"	RSO12	RSIF160	48 [1,219]	24 [610]	50-3/16 [1,275]	53-3/4 [1,365]	26-7/8 [683]	24-1/32 [610]	42 [1,067]	50 [1,270]	55-3/4 [1,416]	56 [1,422]	25-1/32 [636]		
5-SS-2-GL	80,000	8"	10"	RSO12	RSIF160	60 [1,524]	24 [610]	62-3/16 [1,580]	65-3/4 [1,670]	32-7/8 [835]	24-1/32 [610]	42 [1,067]	50 [1,270]	67-3/4 [1,721]	56 [1,422]	25-1/32 [636]		
6-SS-2-GL	100,000	10"	10"	RSO14	RSIF180	72 [1,829]	24 [610]	74-3/16 [1,884]	77-3/4 [1,975]	38-7/8 [987]	24-1/32 [610]	42 [1,067]	50 [1,270]	79-3/4 [2,026]	56 [1,422]	25-1/32 [636]		
7-SS-2-GL	120,000	10"	10"	RSO14	RSIF180	84 [2,134]	24 [610]	86-3/16 [2,189]	89-3/4 [2,280]	44-7/8 [1,140]	24-1/32 [610]	42 [1,067]	50 [1,270]	91-3/4 [2,330]	56 [1,422]	25-1/32 [636]		
4-SS-3-GL	60,000	8"	10"	RSO12	RSIF160	48 [1,219]	36 [914]	50-3/16 [1,275]	53-3/4 [1,365]	26-7/8 [683]	24-1/32 [610]	54 [1,372]	62 [1,575]	55-3/4 [1,416]	68 [1,727]	25-1/32 [636]		
5-SS-3-GL	80,000	8"	10"	RSO12	RSIF160	60 [1,524]	36 [914]	62-3/16 [1,580]	65-3/4 [1,670]	32-7/8 [835]	24-1/32 [610]	54 [1,372]	62 [1,575]	67-3/4 [1,721]	68 [1,727]	25-1/32 [636]		
6-SS-3-GL	100,000	10"	10"	RSO14	RSIF180	72 [1,829]	36 [914]	74-3/16 [1,884]	77-3/4 [1,975]	38-7/8 [987]	24-1/32 [610]	54 [1,372]	62 [1,575]	79-3/4 [2,026]	68 [1,727]	25-1/32 [636]		
7-SS-3-GL	120,000	10"	10"	RSO14	RSIF180	84 [2,134]	36 [914]	86-3/16 [2,189]	89-3/4 [2,280]	44-7/8 [1,140]	24-1/32 [610]	54 [1,372]	62 [1,575]	91-3/4 [2,330]	68 [1,727]	25-1/32 [636]		

	SEE THRO	UGH - SPECIF	ICATIONS						SEE THROUGH	I - DIMENSIONS				MINIMUM FRAMING DIMENSIONS				
Model #	BTU'S	B-VENT	OUTSIDE AIR	REG PV	IN-LINE PV	A INNER GLASS	B VIEWING HEIGHT	C VIEWING WIDTH	D FIREBOX WIDTH	E CENTER OF VENT	F FIREBOX DEPTH	G HEIGHT TO TRIM TOP	H TOTAL FIREBOX HEIGHT	WIDTH	HEIGHT	DEPTH		
4-ST-2-GL	60,000	8"	10"	RSO12	RSIF160	48 [1,219]	24 [610]	50-3/16 [1,275]	53-3/4 [1,365]	26-7/8 [683]	24 [610]	42 [1,067]	50 [1,270]	55-3/4 [1,416]	56 [1,422]	23 [584]		
5-ST-2-GL	80,000	8″	10"	RSO12	RSIF160	60 [1,524]	24 [610]	62-3/16 [1,580]	65-3/4 [1,670]	32-7/8 [835]	24 [610]	42 [1,067	50 [1,270]	67-3/4 [1,721]	56 [1,422]	23 [584]		
6-ST-2-GL	100,000	10"	10"	RSO14	RSIF180	72 [1,829]	24 [610]	74-3/16 [1,884]	77-3/4 [1,975]	38-7/8 [987]	24 [610]	42 [1,067	50 [1,270]	79-3/4 [2,026]	56 [1,422]	23 [584]]		
7-ST-2-GL	120,000	10"	10"	RSO14	RSIF180	84 [2,134]	24 [610]	86-3/16 [2,189]	89-3/4 [2,280]	44-7/8 [1,140]	24 [610]	42 [1,067	50 [1,270]	91-3/4 [2,330]	56 [1,422]	23 [584]		
4-ST-3-GL	60,000	8"	10"	RSO12	RSIF160	48 [1,219]	36 [914]	50-3/16 [1,275]	53-3/4 [1,365]	26-7/8 [683]	24 [610]	54 [1,372]	62 [1,575]	55-3/4 [1,416]	68 [1,727]	23 [584]]		
5-ST-3-GL	80,000	8"	10"	RSO12	RSIF160	60 [1,524]	36 [914]	62-3/16 [1,580]	65-3/4 [1,670]	32-7/8 [835]	24 [610]	54 [1,372]	62 [1,575]	67-3/4 [1,721]	68 [1,727]	23 [584]		
6-ST-3-GL	100,000	10"	10"	RSO14	RSIF180	72 [1,829]	36 [914]	74-3/16 [1,884]	77-3/4 [1,975]	38-7/8 [987]	24 [610]	54 [1,372]	62 [1,575]	79-3/4 [2,026]	68 [1,727]	23 [584]		
7-ST-3-GL	120,000	10"	10"	RSO14	RSIF180	84 [2,134]	36 [914]	86-3/16 [2,189]	89-3/4 [2,280]	44-7/8 [1,140]	24 [610]	54 [1,372]	62 [1,575]	91-3/4 [2,330]	68 [1,727]	23 [584]		

 $<sup>\</sup>cdot$  If using an in-line powervent, use a -IN after the model number at time of order

IMPORTANT: MINIMUM FRAMING DIMENSIONS ASSUMING 1/2" DRYWALL AND NON-COMBUSTIBLE BOARD USED

<sup>·</sup> Fireplaces come standard with Crystal Glass Media. Optional colors and Natural Stone are available at an additional cost

 $<sup>\</sup>cdot$  It is important to refer to the installation and operating manual PRIOR to installation to verify all measurements and clearances


<sup>·</sup> Dimensions are in inches and [millimeters]

<sup>·</sup> Air intake collar may be rotated to vent off the side, or from the bottom of the fireplace

<sup>·</sup> Use UL approved B-Vent pipe and follow all manufacturer installation guidelines.


Vent run approved up to 110' with quantity of 11, 90 degree elbows. 1" clearance to B-Vent must be maintained



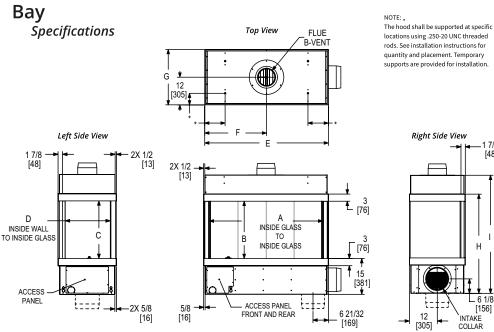

# Right Side View -1 7/8 [48] 12 [305] INTAKE



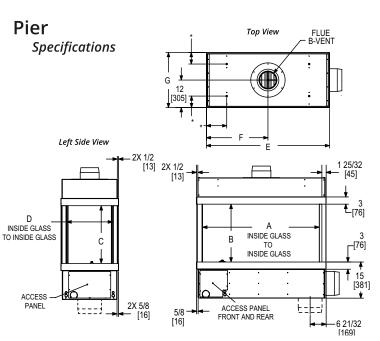

## NOTE: \* The hood shall be supported at specific locations using .250-20 UNC threaded rods. See installation instructions for quantity and placement. Temporary supports are provided for installation. Right Side View

12 [305]

[156]

INTAKE

COLLAR

For more Bay & Pier images, visit www.stellarhearth.com

Front View

Front View

	BAY - SPECIFICATIONS								B/	AY - DIMENSIO	NS				MIN FRAMING DIMENSIONS			
Model #	BTU'S	B-VENT	OUTSIDE AIR	REG PV	IN-LINE PV	A INNER GLASS	B VIEWING HEIGHT	C VIEWING HEIGHT	D INNER GLASS	E FIREBOX WIDTH	F CENTER OF VENT	G FIREBOX DEPTH	H HEIGHT TO TRIM TOP	I TOTAL FIREBOX HEIGHT	WIDTH	HEIGHT	DEPTH	
4-BY-2-GL	60,000	8"	10"	RSO12	RSIF160	48 25/32 [1,239]	24 [610]	24 [610]	18-9/16 [471]	53-3/4 [1,365]	26-7/8 [683]	24 [610]	42 [1,067]	50 [1,270]	52 3/4 [1,340]	56 [1,422]	25 [635]	
5-BY-2-GL	80,000	8"	10"	RSO12	RSIF160	60 25/32 [1,544]	24 [610]	24 [610]	18-9/16 [471]	65-3/4 [1,670]	32-7/8 [835]	24 [610]	42 [1,067]	50 [1,270]	64-3/4 [1,645]	56 [1,422]	25 [635]	
6-BY-2-GL	100,000	10"	10"	RSO14	RSIF180	72 25/32 [1,849]	24 [610]	24 [610]	18-9/16 [471]	77-3/4 [1,975]	38-7/8 [987]	24 [610]	42 [1,067]	50 [1,270]	76-3/4 [1,949]	56 [1,422]	25 [635]	
7-BY-2-GL	120,000	10"	10"	RSO14	RSIF180	84 25/32 [2,153]	24 [610]	24 [610]	18-9/16 [471]	89-3/4 [2,280]	44-7/8 [1,140]	24 [610]	42 [1,067]	50 [1,270]	88-3/4 [2,254]	56 [1,422]	25 [635]	
4-BY-3-GL	60,000	8"	10"	RSO12	RSIF160	48 25/32 [1,239]	36 [914]	36 [914]	18-9/16 [471]	53-3/4 [1,365]	26-7/8 [683]	24 [610]	54 [1,372]	62 [1,575]	52 3/4 [1,340]	68 [1,727]	25 [635]	
5-BY-3-GL	80,000	8"	10"	RSO12	RSIF160	60 25/32 [1,544]	36 [914]	36 [914]	18-9/16 [471]	65-3/4 [1,670]	32-7/8 [835]	24 [610]	54 [1,372]	62 [1,575]	64-3/4 [1,645]	68 [1,727]	25 [635]	
6-BY-3-GL	100,000	10"	10"	RSO14	RSIF180	72 25/32 [1,849]	36 [914]	36 [914]	18-9/16 [471]	77-3/4 [1,975]	38-7/8 [987]	24 [610]	54 [1,372]	62 [1,575]	76-3/4 [1,949]	68 [1,727]	25 [635]	
7-BY-3-GL	120,000	10"	10"	RSO14	RSIF180	84 25/32 [2,153]	36 [914]	36 [914]	18-9/16 [471]	89-3/4 [2,280]	44-7/8 [1,140]	24 [610]	54 [1,372]	62 [1,575]	88-3/4 [2,254]	68 [1,727]	25 [635]	

	PII	ER - SPECIFICA	TIONS						PI	ER - DIMENSIO	NS				MIN FRAMING DIMENSIONS			
Model #	BTU'S	B-VENT	OUTSIDE AIR	REG PV	IN-LINE PV	A INNER GLASS	B VIEWING HEIGHT	C VIEWING HEIGHT	D INNER GLASS	E FIREBOX WIDTH	F CENTER OF VENT	G FIREBOX DEPTH	H HEIGHT TO TRIM TOP	I TOTAL FIREBOX HEIGHT	WIDTH	HEIGHT	DEPTH	
4-PR-2-GL	60,000	8"	10"	RSO12	RSIF160	48 13/32 [1,230]	24 [610]	24 [610]	19 [483]	53-3/4 [1,365]	26-7/8 [683]	24 [610]	42 [1,067]	50 [1,270]	54-3/4 [1,391]	56 [1,422]	23 [584]	
5-PR-2-GL	80,000	8"	10"	RSO12	RSIF160	60 13/32 [1,534]	24 [610]	24 [610]	19 [483]	65-3/4 [1,670]	32-7/8 [835]	24 [610]	42 [1,067]	50 [1,270]	66-3/4 [1,695]	56 [1,422]	23 [584]	
6-PR-2-GL	100,000	10"	10"	RSO14	RSIF180	72 13/32 [1,839]	24 [610]	24 [610]	19 [483]	77-3/4 [1,975]	38-7/8 [987]	24 [610]	42 [1,067]	50 [1,270]	78-3/4 [2,000]	56 [1,422]	23 [584]	
7-PR-2-GL	120,000	10"	10"	RSO14	RSIF180	84 13/32 [2,144]	24 [610]	24 [610]	19 [483]	89-3/4 [2,280]	44-7/8 [1,140]	24 [610]	42 [1,067]	50 [1,270]	90-3/4 [2,305]	56 [1,422]	23 [584]	
4-PR-3-GL	60,000	8"	10"	RSO12	RSIF160	48 13/32 [1,230]	36 [914]	36 [914]	19 [483]	53-3/4 [1,365]	26-7/8 [683]	24 [610]	54 [1,372]	62 [1,575]	54-3/4 [1,391]	68 [1,727]	23 [584]	
5-PR-3-GL	80,000	8"	10"	RSO12	RSIF160	60 13/32 [1,534]	36 [914]	36 [914]	19 [483]	65-3/4 [1,670]	32-7/8 [835]	24 [610]	54 [1,372]	62 [1,575]	66-3/4 [1,695]	68 [1,727]	23 [584]	
6-PR-3-GL	100,000	10"	10"	RSO14	RSIF180	72 13/32 [1,839]	36 [914]	36 [914]	19 [483]	77-3/4 [1,975]	38-7/8 [987]	24 [610]	54 [1,372]	62 [1,575]	78-3/4 [2,000]	68 [1,727]	23 [584]	
7-PR-3-GL	120,000	10"	10"	RSO14	RSIF180	84 13/32 [2,144]	36 [914]	36 [914]	19 [483]	89-3/4 [2,280]	44-7/8 [1,140]	24 [610]	54 [1,372]	62 [1,575]	90-3/4 [2,305]	68 [1,727]	23 [584]	

 $<sup>\</sup>cdot$  If using an in-line powervent, use a -IN after the model number at time of order

IMPORTANT: MINIMUM FRAMING DIMENSIONS ASSUMING 1/2" DRYWALL AND NON-COMBUSTIBLE BOARD USED

 $<sup>\</sup>cdot \ \mathsf{Fireplaces} \ \mathsf{come} \ \mathsf{standard} \ \mathsf{with} \ \mathsf{Crystal} \ \mathsf{Glass} \ \mathsf{Media}. \ \mathsf{Optional} \ \mathsf{colors} \ \mathsf{and} \ \mathsf{Natural} \ \mathsf{Stone} \ \mathsf{are} \ \mathsf{available}$ at an additional cost

 $<sup>\</sup>cdot$  It is important to refer to the installation and operating manual PRIOR to installation to verify all measurements and clearances

<sup>·</sup> Dimensions are in inches and [millimeters]

<sup>·</sup> Air intake collar may be rotated to vent off the side, or from the bottom of the fireplace

Use UL approved B-Vent pipe and follow all manufacturer installation guidelines

Vent run approved up to 110' with quantity of 11, 90 degree elbows. 1" clearance to B-Vent must be maintained






## Left & Right Corner

**Specifications** 


Left Side View




#### NOTE: \*

The hood shall be supported at specific locations using .250-20 UNC threaded rods. See installation instructions for quantity and placement. Temporary supports are provided for installation.


Right Side View





Note: Right Corner Schematics Shown


## Four-Sided **Specifications**




Front View

The hood shall be supported at specific locations using .250-20 UNC threaded rods. See installation instructions for quantity and placement. Temporary supports are provided for installation.

Right Side View

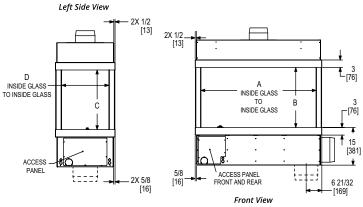



For more Left & Right Corner and Four-Sided images, visit at www.stellarhearth.com

	LEFT & RIGHT CORNER - SPECIFICATIONS								LEFT & RIGH	IT CORNER - D	IMENSIONS				MIN FRAMING DIMENSIONS			
Model #	BTU'S	B-VENT	OUTSIDE AIR	REG PV	IN-LINE PV	A INNER GLASS	B VIEWING HEIGHT	C VIEWING HEIGHT	D INNER GLASS	E FIREBOX WIDTH	F CENTER OF VENT	G FIREBOX DEPTH	H HEIGHT TO TRIM TOP	I TOTAL FIREBOX HEIGHT	WIDTH	HEIGHT	DEPTH	
4-LC-2-GL/4-RC-2-GL	60,000	8"	10"	RSO12	RSIF160	48 13/32 [1,230]	24 [610]	24 [610]	18-9/16 [471]	53-3/4 [1,365]	26-7/8 [683]	24 [610]	42 [1,067]	50 [1,270]	54-3/4 [1,391]	56 [1,422]	25 [636]	
5-LC-2-GL/5-RC-2-GL	80,000	8"	10"	RSO12	RSIF160	60 13/32 [1,534]	24 [610]	24 [610]	18-9/16 [471]	65-3/4 [1,670]	32-7/8 [835]	24 [610]	42 [1,067]	50 [1,270]	66-3/4 [1,695]	56 [1,422]	25 [636]	
6-LC-2-GL/6-RC-2-GL	100,000	10"	10"	RSO14	RSIF180	72 13/32 [1,839]	24 [610]	24 [610]	18-9/16 [471]	77-3/4 [1,975]	38-7/8 [987]	24 [610]	42 [1,067]	50 [1,270]	78-3/4 [2,000]	56 [1,422]	25 [636]	
7-LC-2-GL/7-RC-2-GL	120,000	10"	10"	RSO14	RSIF180	84 13/32 [2,144]	24 [610]	24 [610]	18-9/16 [471]	89-3/4 [2,280]	44-7/8 [1,140]	24 [610]	42 [1,067]	50 [1,270]	90-3/4 [2,305]	56 [1,422]	25 [636]	
4-LC-3-GL/4-RC-3-GL	60,000	8"	10"	RSO12	RSIF160	48 13/32 [1,230]	36 [914]	36 [914]	18-9/16 [471]	53-3/4 [1,365]	26-7/8 [683]	24 [610]	54 [1,372]	62 [1,575]	54-3/4 [1,391]	68 [1,727]	25 [636]	
5-LC-3-GL/5-RC-3-GL	80,000	8"	10"	RSO12	RSIF160	60 13/32 [1,534]	36 [914]	36 [914]	18-9/16 [471]	65-3/4 [1,670]	32-7/8 [835]	24 [610]	54 [1,372]	62 [1,575]	66-3/4 [1,695]	68 [1,727]	25 [636]	
6-LC-3-GL/6-RC-3-GL	100,000	10"	10"	RSO14	RSIF180	72 13/32 [1,839]	36 [914]	36 [914]	18-9/16 [471]	77-3/4 [1,975]	38-7/8 [987]	24 [610]	54 [1,372]	62 [1,575]]	78-3/4 [2,000]	68 [1,727]	25 [636]	
7-LC-3-GL/7-RC-3-GL	120,000	10"	10"	RSO14	RSIF180	84 13/32 [2,144]	36 [914]	36 [914]	18-9/16 [471]	89-3/4 [2,280]	44-7/8 [1,140]	24 [610]	54 [1,372]	62 [1,575]	90-3/4 [2,305]	68 [1,727]	25 [636]	

	FOUR S	SIDED - SPECIF	ICATIONS						FOUR	SIDED - DIMEN	ISIONS				MIN FRAMING DIMENSIONS			
Model #	BTU'S	B-VENT	OUTSIDE AIR	REG PV	IN-LINE PV	A INNER GLASS	B VIEWING HEIGHT	C VIEWING HEIGHT	D INNER GLASS	E FIREBOX WIDTH	F CENTER OF VENT	G FIREBOX DEPTH	H HEIGHT TO TRIM TOP	I TOTAL FIREBOX HEIGHT	WIDTH	HEIGHT	DEPTH	
4-4S-2-GL	60,000	8"	10"	RSO12	RSIF160	48 25/32 [1,239]	24 [610]	24 [610]	19 [483]	53-3/4 [1,365]	26-7/8 [683]	24 [610]	42 [1,067]	50 [1,270]	52-3/4 [1,340]	56 [1,422]	23 [584]	
5-4S-2-GL	80,000	8"	10"	RSO12	RSIF160	60 25/32 [1,544]	24 [610]	24 [610]	19 [483]	65-3/4 [1,670]	32-7/8 [835]	24 [610]	42 [1,067]	50 [1,270]	64-3/4 [1,645]	56 [1,422]	23 [584]	
6-4S-2-GL	100,000	10"	10"	RSO14	RSIF180	72 25/32 [1,849]	24 [610]	24 [610]	19 [483]	77-3/4 [1,975]	38-7/8 [987]	24 [610]	42 [1,067]	50 [1,270]	76-3/4 [1,949]	56 [1,422]	23 [584]	
7-4S-2-GL	120,000	10"	10"	RSO14	RSIF180	84 25/32 [2,153]	24 [610]	24 [610]	19 [483]	89-3/4 [2,280]	44-7/8 [1,140]	24 [610]	42 [1,067]	50 [1,270]	88-3/4 [2,254]	56 [1,422]	23 [584]	
4-4S-3-GL	60,000	8"	10"	RSO12	RSIF160	48 25/32 [1,239]	36 [914]	36 [914]	19 [483]	53-3/4 [1,365]	26-7/8 [683]	24 [610]	54 [1,372]	62 [1,575]	52-3/4 [1,340]	68 [1,727]	23 [584]	
5-4S-3-GL	80,000	8"	10"	RSO12	RSIF160	60 25/32 [1,544]	36 [914]	36 [914]	19 [483]	65-3/4 [1,670]	32-7/8 [835]	24 [610]	54 [1,372]	62 [1,575]	64-3/4 [1,645]	68 [1,727]	23 [584]	
6-4S-3-GL	100,000	10"	10"	RSO14	RSIF180	72 25/32 [1,849]	36 [914]	36 [914]	19 [483]	77-3/4 [1,975]	38-7/8 [987]	24 [610]	54 [1,372]	62 [1,575]	76-3/4 [1,949]	68 [1,727]	23 [584]	
7-4S-3-GL	120,000	10"	10"	RSO14	RSIF180	84 25/32 [2,153]	36 [914]	36 [914]	19 [483]	89-3/4 [2,280]	44-7/8 [1,140]	24 [610]	54 [1,372]	62 [1,575]	88-3/4 [2,254]	68 [1,727]	23 [584]	

<sup>·</sup> If using an in-line powervent, use a -IN after the model number at time of order

IMPORTANT: MINIMUM FRAMING DIMENSIONS ASSUMING 1/2" DRYWALL AND NON-COMBUSTIBLE BOARD USED

<sup>·</sup> Fireplaces come standard with Crystal Glass Media. Optional colors and Natural Stone are available

 $<sup>\</sup>cdot$  It is important to refer to the installation and operating manual PRIOR to installation to verify all measurements and clearances

<sup>·</sup> Dimensions are in inches and [millimeters]

<sup>·</sup> Air intake collar may be rotated to vent off the side, or from the bottom of the fireplace

Use UL approved B-Vent pipe and follow all manufacturer installation guidelines
 Vent run approved up to 110' with quantity of 11, 90 degree elbows. 1" clearance to B-Vent must be maintained













## **Custom Fireplace Solutions**

If you didn't find the design or size you were looking for in the Galaxy Series™- *no problem.* 

The Stellar Hearth Products team has won multiple hearth industry awards for fireplace innovation, and also has an exciting line of custom fireplaces for those unique fireplace designs that sit outside the standard parameters.

Stellar Hearth Products will work with you collaboratively to help customize the perfect design of fireplace for your unique needs.

#### Any Shape - Any Size - For Any Location

- · Safe-T-Touch Glass & Open Hearth (UL Certified)
- · Indoor, Outdoor or Indoor-Outdoor See-Through
- · Quarter-round, half-round or fully-round
- · Modern or traditional interiors
- · Fully customize to make one-of-a-kind with options like elevated burners, natural wood or driftwood log sets, reflective mirrors, glass or stone media, Envision panels, laser cut designs, LED lights and more

## - Get Started Today -

Enter your fireplace project specifications in the Build Your Own Custom Fireplace Configurator www.stellarhearth.com

Stellar Hearth Products a division of Hearth & Home Technologies



Stellar Hearth Products strive to combine bold creativity and advanced technology collaboratively with our customer's vision, resulting in compelling fire features for interior and exterior hearth projects.

16873 Fish Point Rd SE - Prior Lake, MN - 55372 (P) 952-224-4072 (E) info@stellarhearth.com

We have partnered with some of the finest hearth dealers across the United States and Canada. For more information on where you can buy Stellar Hearth Products in your area, please contact:











